pg 020 2/5/99 11:23 AM Page 1

SERIES 207

This series has more models than any other in the line. There are bar, handle and base variations and two stainless steel models. Bolt retainer (207105) is furnished with solid bar models, and two flanged washers (507107) with "U" bar models. Accommodates any 5/16" spindle (not supplied). See pages 69-73 for accessories. Ergonomic handle grips are included for greater operator comfort.

ALSO AVAILABLE

As **Air/Hydraulic**

Model 807-L	**Page 107**
Model 807-UL	**Page 107**

As **Toggle-Lock Plus**

Model 207-SA	**Page 61**
Model 207-UA	**Page 61**

In **Stainless Steel**

Model 207-UBSS	**Page 67**
Model 207-USS	**Page 67**

52080
Model 207-S
Solid Bar
Flanged Base

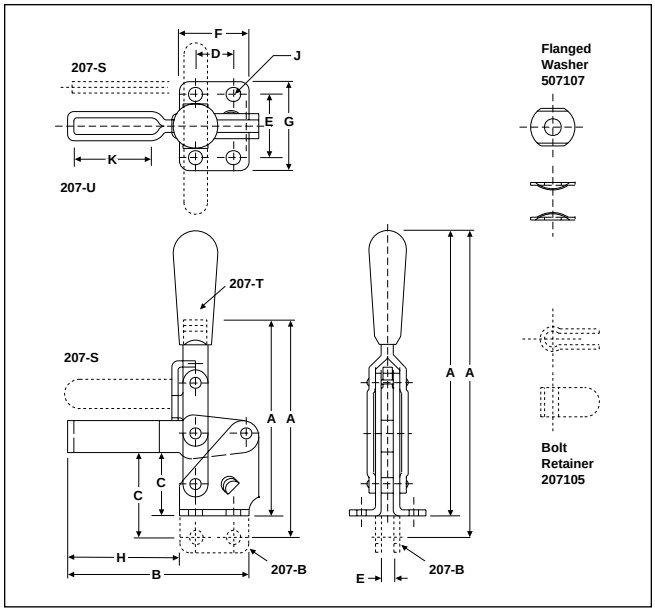

52084
Model 207-L
Long Solid Bar
Flanged Base

52086
Model 207-LB
Long Solid Bar
Straight Base

52085
Model 207-SB
Solid Bar
Straight Base

52087
Model 207-TL
"T" Handle
Long Solid Bar
Flanged Base

52081
Model 207-TLB
"T" Handle
Long Solid Bar
Straight Base

52082
Model 207-TS
"T" Handle
Solid Bar
Flanged Base

52083
Model 207-TSB
"T" Handle
Solid Bar
Straight Base

52072
Model 207-TU
"T" Handle
"U" Bar
Flanged Base

52073
Model 207-TUB
"T" Handle
"U" Bar
Straight Base

52077
Model 207-TUL
"T" Handle
Long "U" Bar
Flanged Base

52088
Model 207-TULB
"T" Handle
Long "U" Bar
Straight Base

52070
Model 207-U
"U" Bar
Flanged Base

52075
Model 207-UB
"U" Bar
Straight Base

52074
Model 207-UL
Long "U" Bar
Flanged Base

52076
Model 207-ULB
Long "U" Bar
Straight Base

Model No.	EDP No.	Holding Capacity	Weight	Handle Moves	Bar Opens	Dimensions									
						A	B	C	D	E	F	G	H	J	K
207-L	52084	450 lbs.	.74 lbs.	62°	115°	5.76	5.02	1.25	.75	1.25	1.38	1.75	3.45	.28	—
207-LB	52086	450 lbs.	.74 lbs.	62°	115°	6.06	5.02	1.55	.75	0.25	1.38	—	3.45	.28	—
207-S	52080	475 lbs.	.69 lbs.	62°	115°	5.76	3.75	1.25	.75	1.25	1.38	1.75	2.19	.28	—
207-SB	52085	475 lbs.	.69 lbs.	62°	115°	6.06	3.75	1.55	.75	0.25	1.38	—	2.19	.28	—
207-TL	52087	450 lbs.	.81 lbs.	62°	115°	3.88	5.02	1.25	.75	1.25	1.38	1.75	3.45	.28	—
207-TLB	52081	500 lbs.	.81 lbs.	62°	115°	4.18	5.03	1.55	.75	0.25	1.38	—	3.45	.28	—
207-TS	52082	475 lbs.	.74 lbs.	62°	115°	3.88	3.75	1.25	.75	1.25	1.38	1.75	2.19	.28	—
207-TSB	52083	500 lbs.	.74 lbs.	62°	115°	4.18	3.75	1.55	.75	0.25	1.38	—	2.19	.28	—
207-TU	52072	375 lbs.	.72 lbs.	62°	115°	3.88	3.68	1.25	.75	1.25	1.38	1.75	2.15	.28	1.30
207-TUB	52073	375 lbs.	.72 lbs.	62°	115°	4.18	3.68	1.55	.75	0.25	1.38	—	2.15	.28	1.30
207-TUL	52077	350 lbs.	.80 lbs.	62°	115°	3.88	5.41	1.25	.75	1.25	1.38	1.75	3.85	.28	2.75
207-TULB	52088	375 lbs.	.80 lbs.	62°	115°	4.18	5.41	1.55	.75	0.25	1.38	—	3.85	.28	2.75
207-U	52070	375 lbs.	.67 lbs.	62°	115°	5.76	3.68	1.25	.75	1.25	1.38	1.75	2.15	.28	1.30
207-UB	52075	375 lbs.	.67 lbs.	62°	115°	6.06	3.68	1.55	.75	0.25	1.38	—	2.15	.28	1.30
207-UBSS	52089	375 lbs.	.70 lbs.	62°	115°	6.06	4.38	1.55	.75	0.25	1.38	—	3.06	.28	2.13
207-UL	52074	350 lbs.	.75 lbs.	62°	115°	5.76	5.41	1.25	.75	1.25	1.38	1.75	3.85	.28	2.75
207-ULB	52076	350 lbs.	.75 lbs.	62°	115°	6.06	5.41	1.55	.75	.25	1.38	—	3.85	.28	2.75
207-USS	52079	400 lbs.	.70 lbs.	62°	115°	5.76	4.38	1.25	.75	1.25	1.38	1.75	3.06	.28	2.13